
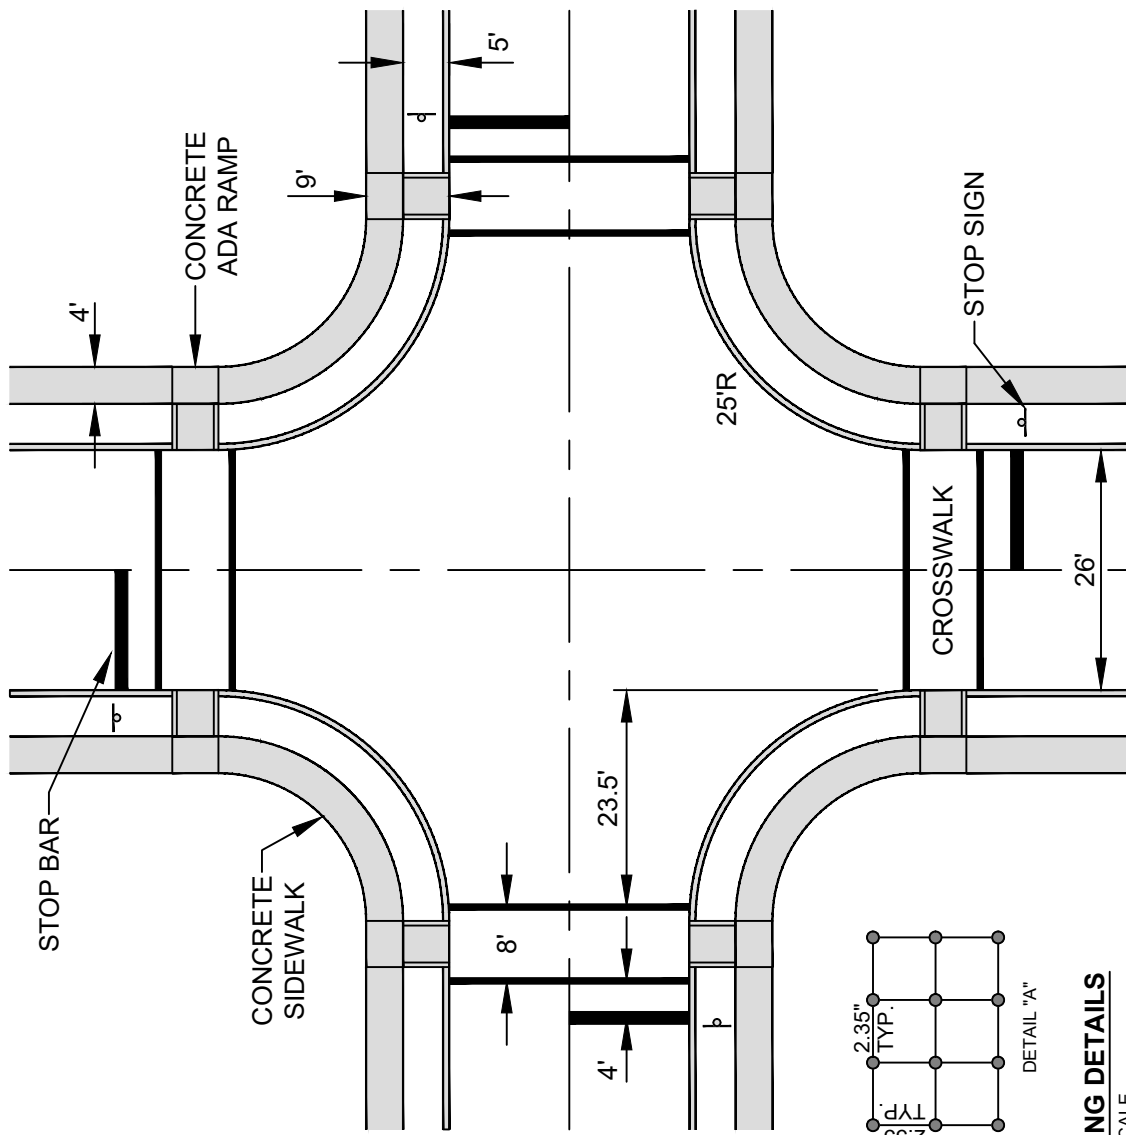


TACTILE WARNING DETAILS
NOT TO SCALE

INSTALLATION NOTES:

1. THE TRUNCATED DOME SURFACE SHALL CONTRAST VISUALLY WITH THE ADJOINING WALKING SURFACES EITHER LIGHT-ON-DARK, OR DARK ON LIGHT. THE MATERIAL USED TO PROVIDE CONTRAST SHALL BE AN INTEGRAL PART OF THE TRUNCATED SURFACE.
2. RETROFIT INSTALLATIONS WILL NOT REQUIRE EXISTING DEPRESSED CURBING TO BE REPLACED. A NOMINAL 6" TO 8" SETBACK FROM FACE OF CURB SHALL BE ENFORCED NEAR EDGE OF TACTILE DOMES.
3. COST OF INSTALLATION AND MATERIALS FOR TACTILE WARNING DEVICES SHALL BE INCLUDED IN THE PRICE BID FOR THE RAMPS AND SIDEWALKS.

1. JOINT FILLER SHALL MEET THE REQUIREMENTS OF SECTION 701.08b AND 701.08e.
2. EXPANSION JOINT SHALL BE USED BETWEEN SIDEWALK AND CURBS, ADA RAMPS, DRIVEWAYS, STREETS, RETAINING WALLS, ETC.



RESIDENTIAL STREET INTERSECTION
NOT TO SCALE

REVISION	BY	DATE

DATE: 4-11-22 STANDARD NO.: STRT-07

RESIDENTIAL ADA RAMP
STANDARD DETAILS
CITY OF JENKS, OKLAHOMA
ENGINEERING DEPARTMENT