



ALL STREET SIGNS SHALL BE EXTRUDED ALUMINUM BLADES. SIZE OF SIGNS AND LETTERING PER MUTCD STANDARD SPECIFICATIONS

BOTTOM OF STREET SIGN OR STOP SIGN SHALL BE 7' FROM GRADE. SIGN SECURED WITH 3/8" HEAD CARRIAGE BOLTS THAT ARE 3" LONG.

2" x 2" x LENGTH GALVANIZED ALUMINUM POST GOES 12" INTO BREAKAWAY BASE SECURED WITH 3/8" HEAD CARRIAGE BOLTS THAT ARE 3" LONG.


2.25" x 2.25" x 36" GALVANIZED ALUMINUM BREAKAWAY BASE. THE BASE BURIES 34" INTO THE GROUND WITH CONCRETE. THE POST INSERTS 12" INTO THE BASE.

CONCRETE ANCHOR
(WITH CITY APPROVAL ONLY)

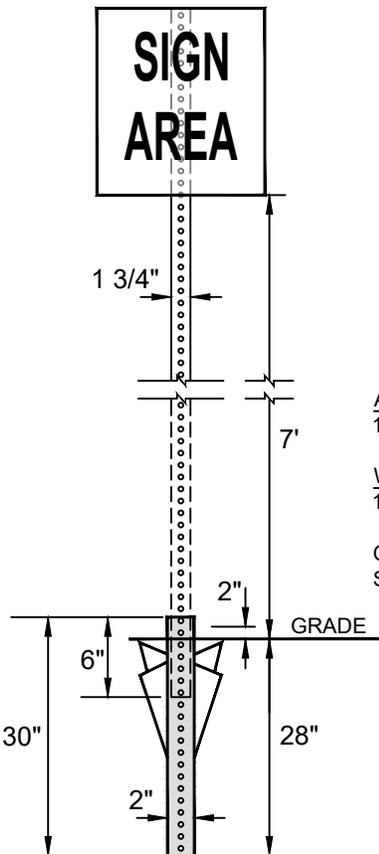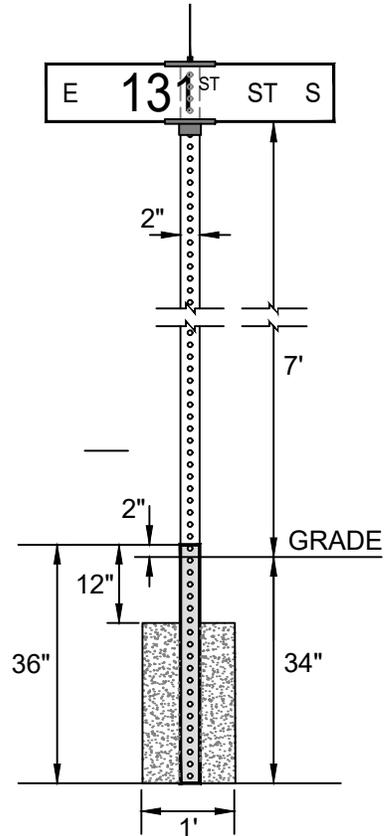


ANCHOR POST:
12 GAUGE x 2" SQUARE x 30" LONG

WINGS:
10 GAUGE, 4" x 12"
ASTM A569 COMMERCIAL
QUALITY WELDED TO ALL 4 CORNERS
STARTING 2 1/2" DOWN FROM TOP

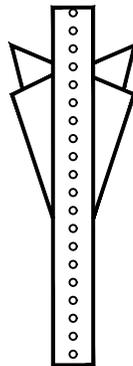

MULTI-DIRECTIONAL ANCHOR
FOR USE IN SOIL

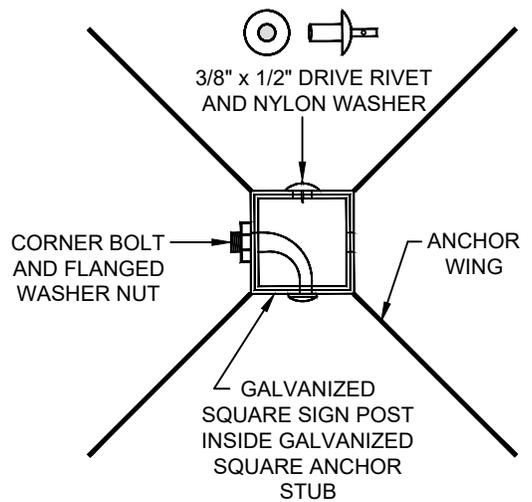

STREET SIGN & POST INSTALLATION
STANDARD DETAILS

CITY OF JENKS, OKLAHOMA

ENGINEERING DEPARTMENT

DATE: 4-11-22

STANDARD NO. STRT-19